3800 Swivel Belt – Order Form

Email Order Form to: sales@arrowsecurityshutters.co.uk

ARROW A	\rightarrow
SECURITY SHUTTERS /	
Tel: 0800 633 5736	


Customer:	Delivery Address:


Self-Fit DIY shutters that are pre-made and easy to fit


How To Measure Using the diagram below write in the Opening Width and the opening height and complete the Options Tick-Box. When the shutter is fully raised, a minimum of 50mm bottom slat hangs down into the opening. From each edge of the opening width, 60mm is required for each of the guide rails.

Box Sizes (maximum shutter height including box for each box size)

Doors up to 1600mm high (box size 165mm) | Doors up to 1900mm high (box size 180mm) | Doors up to 2800mm high (box size 205mm)

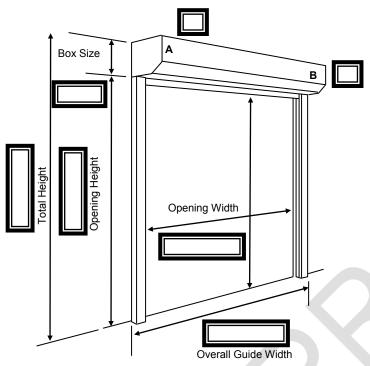





Total Height = full height of shutter including box.

Guide Height = from bottom of shutter to underside of shutter box **Box size =** See Box Sizes above.

Opening Height = from bottom of shutter guide to Underside of Box. (Clear opening height is less 50mm hangdown)

Opening Width = Width from inside of each guide rail.


Overall Guide Width = full width of shutter, outside of guide rails.

Opening width + 60mm + 60mm for each guide rail


Options Tick-box Swivel belt operated, Viewed looking at the box please tick A or B to which side it is to be on: Complete the tick box and using the diagram below select the exit for the belt

Slat Type	Slat Type None	Slat Bottom Slat		Guide Rail	Box
Vented	Vented	Colour Colour		Colour	Colour

Guide Fixing Face (F)	Guide Fixing Reveal (R)	Box Position above Opening	Box Position in Opening	Shutter is covering a window	Shutter is covering a doorway



Guide Detail	Face Fix (F)
24mm	Face Fix (F) Reveal Fix (R)



Please send a photo of the opening you are covering and enter additional information here: