

Flame / Smoke Curtain – Order

Email Order Form to: sales@arrowsecurityshutters.co.uk


Customer:

Delivery Address:

Self-Fit DIY shutters that are pre-made and easy to fit

How To Measure




- 1.WIDTH:** Measure the width of the opening in three locations top middle and bottom. Use the smallest figure as your measurement
- 2.HEIGHT:** Measure the height of the opening in two locations left and right sides top to bottom. Use the smallest figure as your measurement.
- Using the diagram below: Enter all the sizes. On face fix shutters the guide rails are set 100mm on from each edge of the opening width. If the door is to be fitted within the reveal (side fix) of the opening the guide rails will be within the structural opening. Total height is opening height plus box. When the door is fully open the bottom rail hangs down 50mm.



Box Sizes (maximum shutter height including box for each box size)

Internal Fitted Shutter (box size 200mm Square box)

Externally Fitted Shutter (box size 220mm Square box)

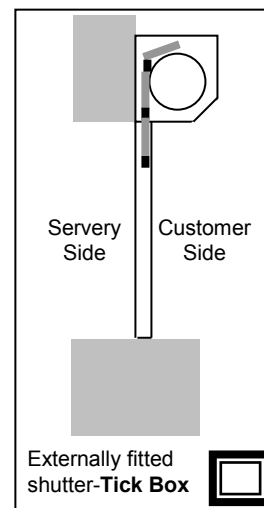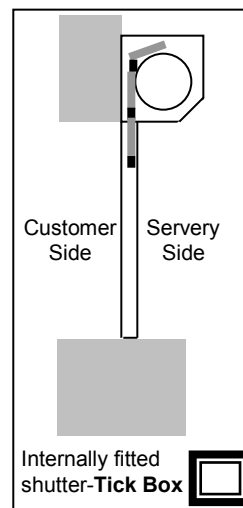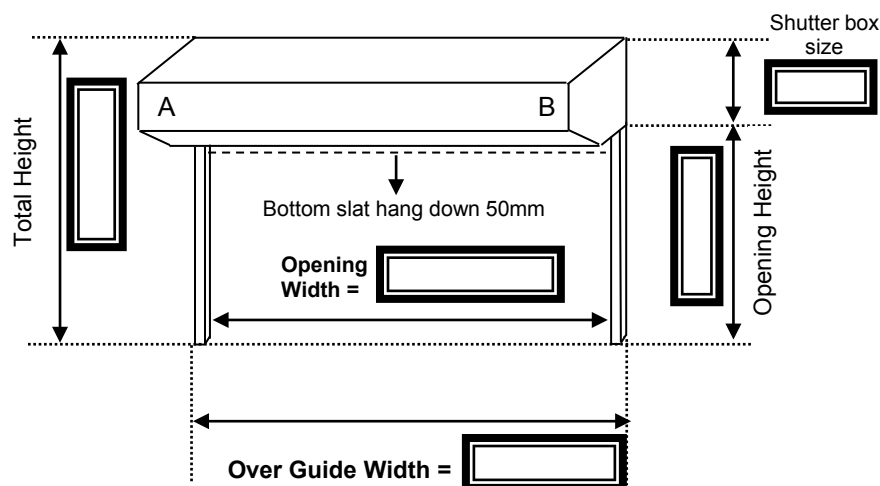


Options Tick-box: Electric operated, please tick A or B to which side the motor is on Viewed looking at the box




Standard colour for Bottom slat, box and guides is White RAL 9016. Can be powder coated to a range of other colours

Curtain Colour	Bottom Slat Colour	Box Colour	Guide Rail Colour	FC + Panel	Auto Release	Audio Device Message	Audio Device Talking	Smoke Detector Loni	Smoke Detector Optical	Heat Detector	Fire Sealant
Grey											

Box Position above Opening	Box Position in Opening	Box in Opening	Left Guide Fixing Detail Face fix (F) / Reveal fix (R)	Right Guide Fixing Detail Face fix (F) / Reveal fix (R)

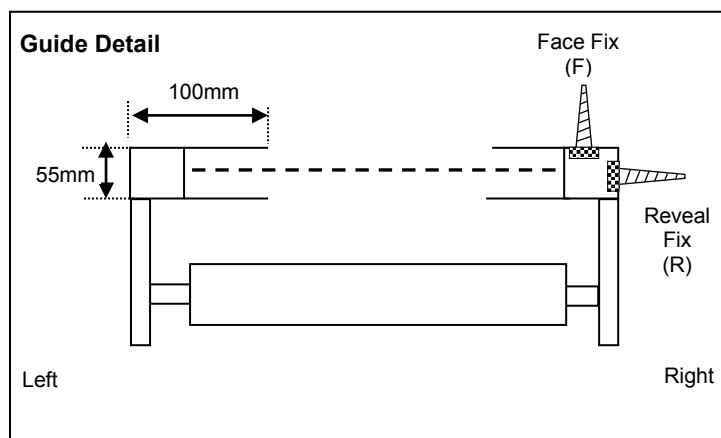

If manual override motor is required please select crank exit



Please send a photo of the opening you are covering and enter additional information here: